


Filter Typ W-HS




Technische Daten

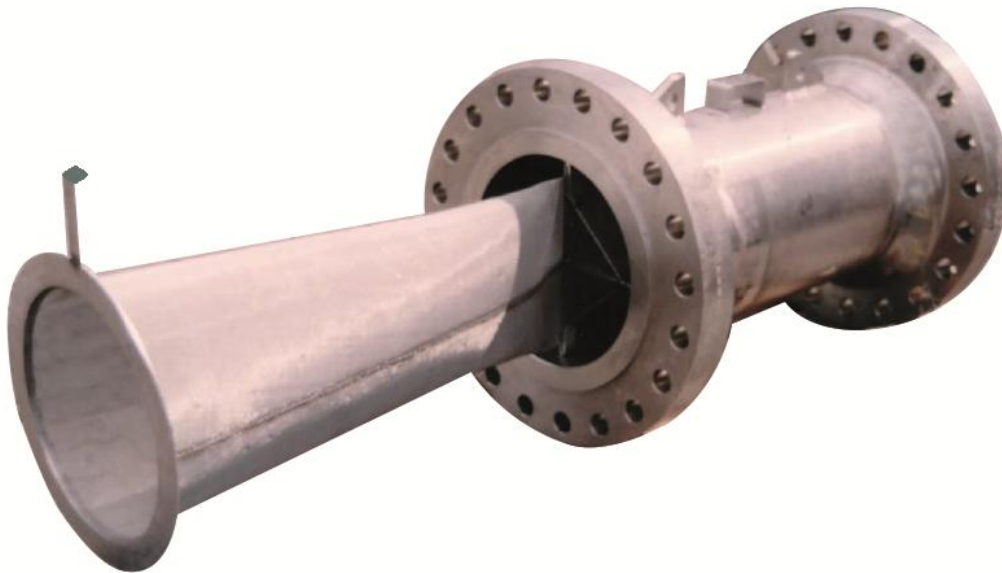

T: +49 (0)62 32 4 49 86
F: +49 (0)62 32 39 86
info@w-filter.de
www.w-filter.de



Filter Typ W-HS - Technische Daten Anfahrfilter / Hutsieb

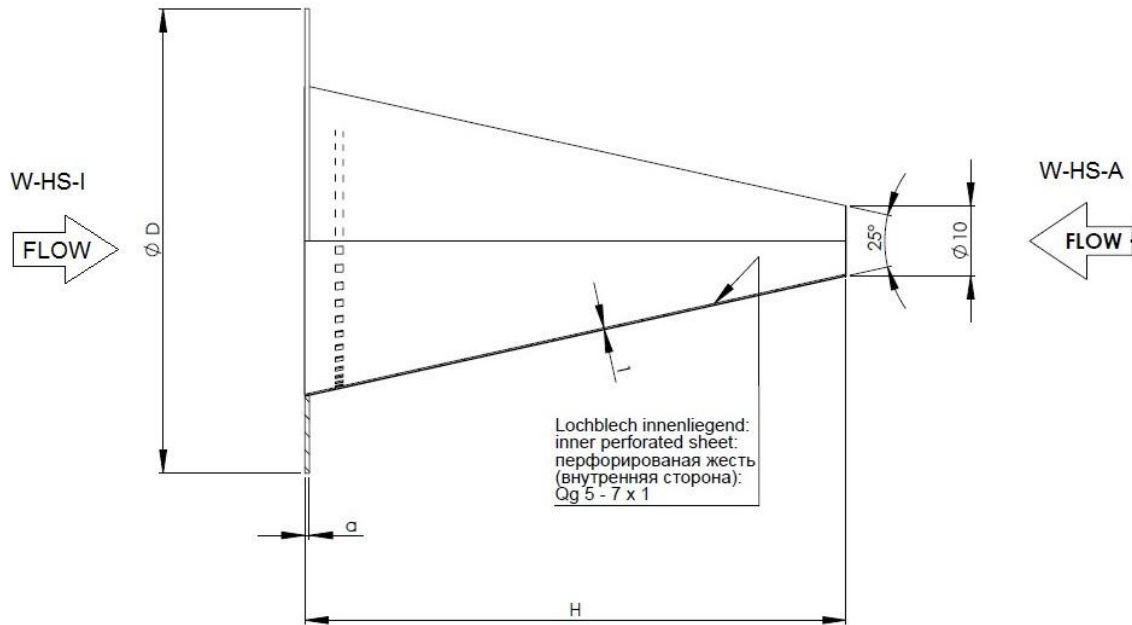

DN	Abmessungen [mm]										
	H	a	D								
			PN 6	PN 10	PN 16	PN 25	PN 40	PN 63	PN 100	PN 250	PN 320
25	29	1	64	71	71	71	71	82	82	83	93
32	45	1	76	82	82	82	82	88	88		
40	63	1	86	92	92	92	92	103	103	109	119
50	86	1	96	107	107	107	107	113	119	124	134
65	120	1	116	127	127	127	127	138	144	154	170
80	153	1	132	142	142	142	142	148	154	170	190
100	198	1	152	162	162	168	168	174	180	202	229
125	255	1,2	182	192	192	194	194	210	217	242	274
150	312	1,2	207	218	218	224	224	247	257	284	311
200	424	1,5	262	273	273	284	290	309	324	358	398
250	537	1,5	317	328	328	340	352	364	391	442	488
300	650	2	373	378	384	400	417	424	458		
350	762	2	423	438	444	457	474	486	512		
400	875	2	473	489	495	514	546	543			
500	1101	2	578	594	617	624	628				
600	1326	2	679	695	734	731					

Materialien: Kragen 1.4571, Maschengewebe 1.4401. Technische und konstruktive Änderungen bleiben vorbehalten.

Bitte geben Sie die gewünschte Flussrichtung an: W-HS-I (von Innen) oder W-HS-A (von Aussen).

